



	Viewable Angle	Close to 180°		Replacement Battery	Available Option
Communication Info.	Frequency	2.4GHz	Operating & Storage Ambient	Operating Temperature	0~40℃
	Protocol	Private Protocol		Storage Temperature	0~40℃
	Distance	13 - 15m		Operating Humidity	45%~70%RH

2.3.2. ESL Pictures

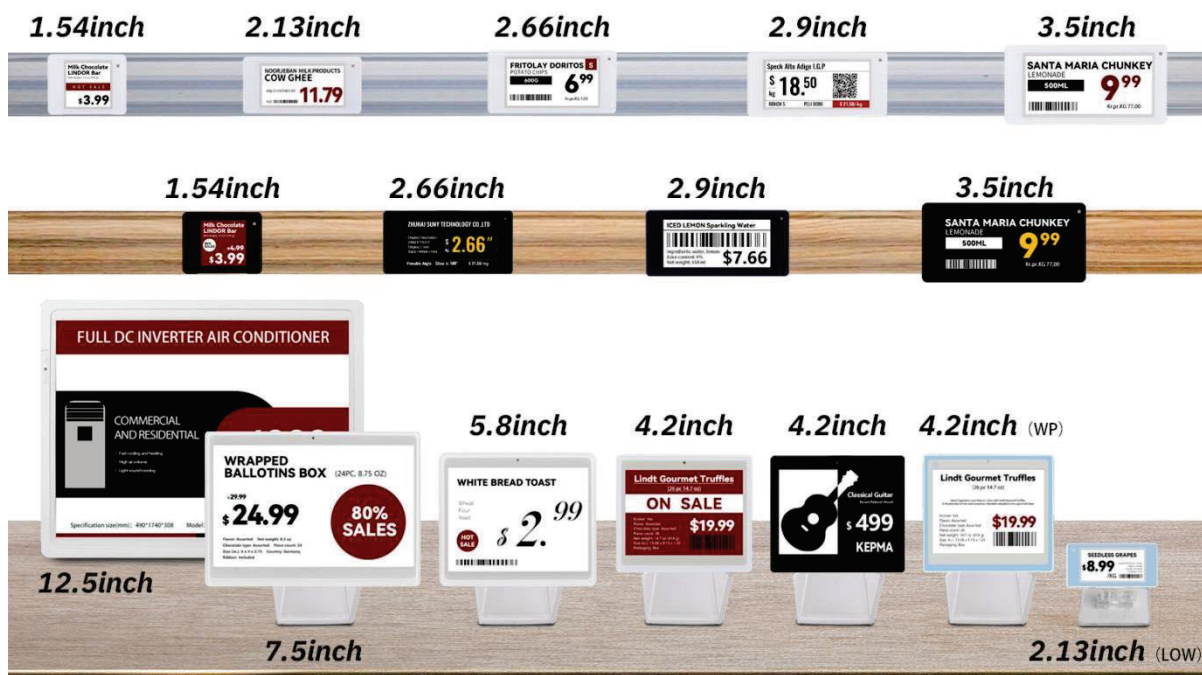

2.3.3. ESL Structures

ESL composition: Front cover plate, E-ink display, PCBA board, Battery, Back cover plate.

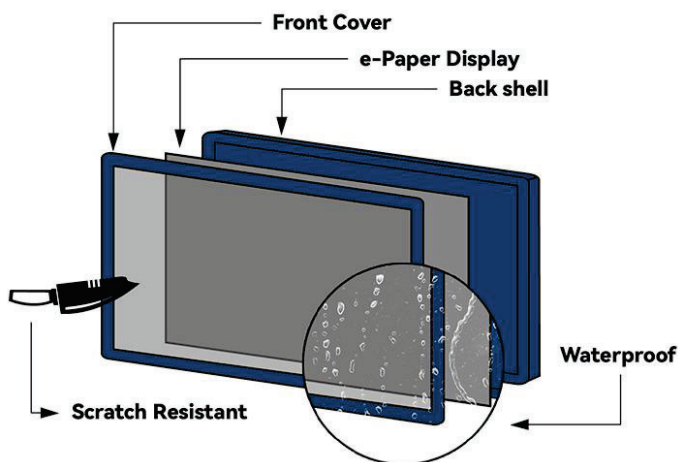

- The front cover plate is made of 4H hardness acrylic, which has good anti-drop and anti-scratch characteristics.
- E-ink Display: Bistable characteristics, still displaying information after power failure, low power consumption, clear without backlight.
- PCBA Board: STM microelectronics chips.